


## Parts Included with Each Load Scale:


Load Scale Gauge in Protective Box



Mounting Bracket

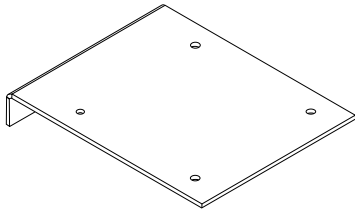

Hardware



Fittings




90° Elbow

Straight

Street Tee

# Right Weigh Load Scales

## Exterior Load Scale 310 Series

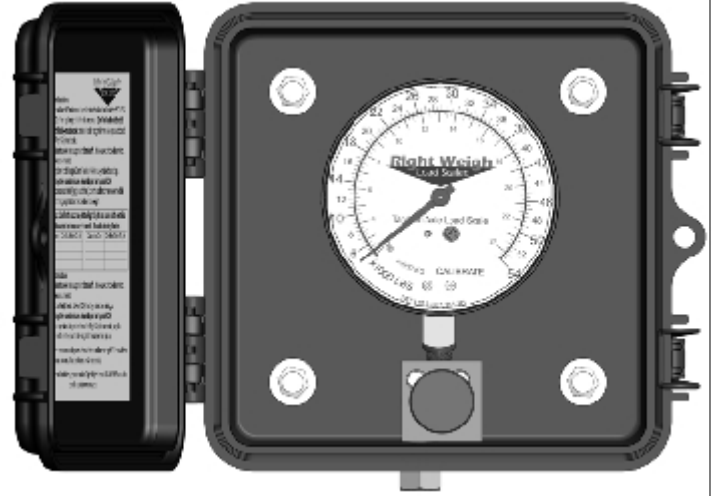

## Instruction Manual

Please read carefully before installation

## Operating Instructions:

Step 1: Park on a level surface. Shift the transmission to neutral and set the parking brakes.

Step 2: Chock the wheels to prevent unexpected vehicle movement.

Step 3: Release the parking brakes.

Step 4: Make sure the Height Control Valve (HCV) has fully inflated the air bags. If needed, briefly dump the air from the suspension and allow the HCV to refill the system. (This may take several minutes depending on the type of HCV.)

Step 5: Pull the gauge air valve knob into the open position.

Step 6: View the load scale gauge to determine the on-the-ground axle group weight.

Step 7: Push the gauge air valve knob into the closed position and latch the door shut.

## Troubleshooting:

Erratic or inaccurate readings could result from the following:

- 1) The vehicle is **NOT** parked on a level surface; parking on a sloped or banked surfaces will cause the vehicle weight distribution to shift between the axle groups.
- 2) The vehicle's brakes are on; When the vehicle brakes are set, they could potentially apply additional pressure or torque on the suspension air bags.
- 3) The vehicle is parked on an uneven or rough surface; If one or more of the vehicle's wheels are in a pothole, that could result in additional pressure or torque on the suspension air bags.
- 4) The height control valve (HCV) is malfunctioning and/or broken; To test for an HCV problem, follow steps 1 to 5 of the operating instructions (the trailer should be loaded). Write down the weight reading from the load scale. Then, drive the vehicle around the block and return to the same location. Follow steps 1 to 5 of the operating instructions again to get a second reading for the load scale. If the two readings are significantly different then the HCV might be malfunctioning and/or broken.

For additional installation support please call Right Weigh, Inc.

Toll free (888) 818-2058 or (503) 628-0838

©2006 Right Weigh, Inc. All rights reserved.

## Installation Instructions:

Step 1: Mount the 310 Series load scale gauge in a location that is easily accessible and safe from damage (posts, forklifts, tire caps, etc.).

⚠ Attention: DO NOT mount the load scale box directly to the chassis or any other main beam unless it is approved by the trailer manufacturer. Doing so may void your warranty with the vehicle manufacturer.

⚠ Attention: DO NOT mount the load scale box on the stinger.





Step 2: Dump the air from the suspension system. Locate and remove the suspension airline from the top of the most easily accessible air bag. (Fig. 1)

Step 3: Insert the Street Tee fitting into the top of the air bag. Reattach the suspension airline into the top of the Street Tee. (Fig. 2)

Step 4: Using the 90° Elbow fitting, Straight fitting and 1/4" nylon tubing, run a new airline from the Street Tee to the load scale. Usually, the Straight fitting is inserted into the Street Tee, and the 90° Elbow fitting is inserted into the bottom of the load scale. (Fig. 3) (1/4" nylon tubing is not included with the load scale kit.)

⚠ Note: If the trailer suspension is on a slider, run the new airline along the same path as the existing cable and airline assembly.

Step 5: Air-up the suspension system and check all fitting connections for air leaks.

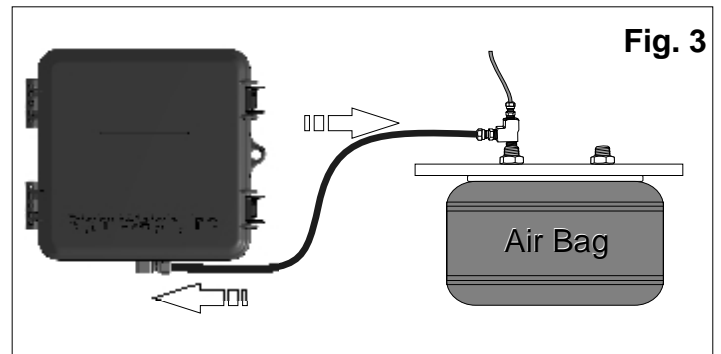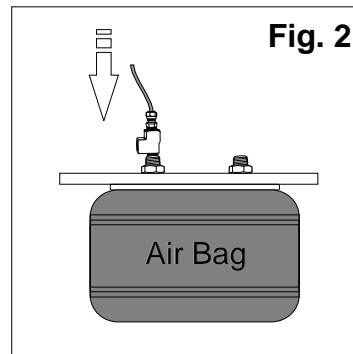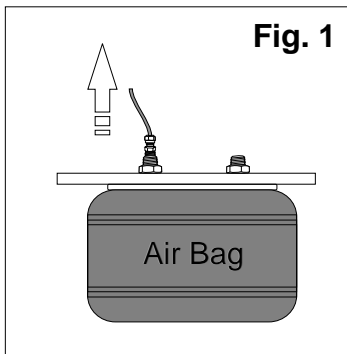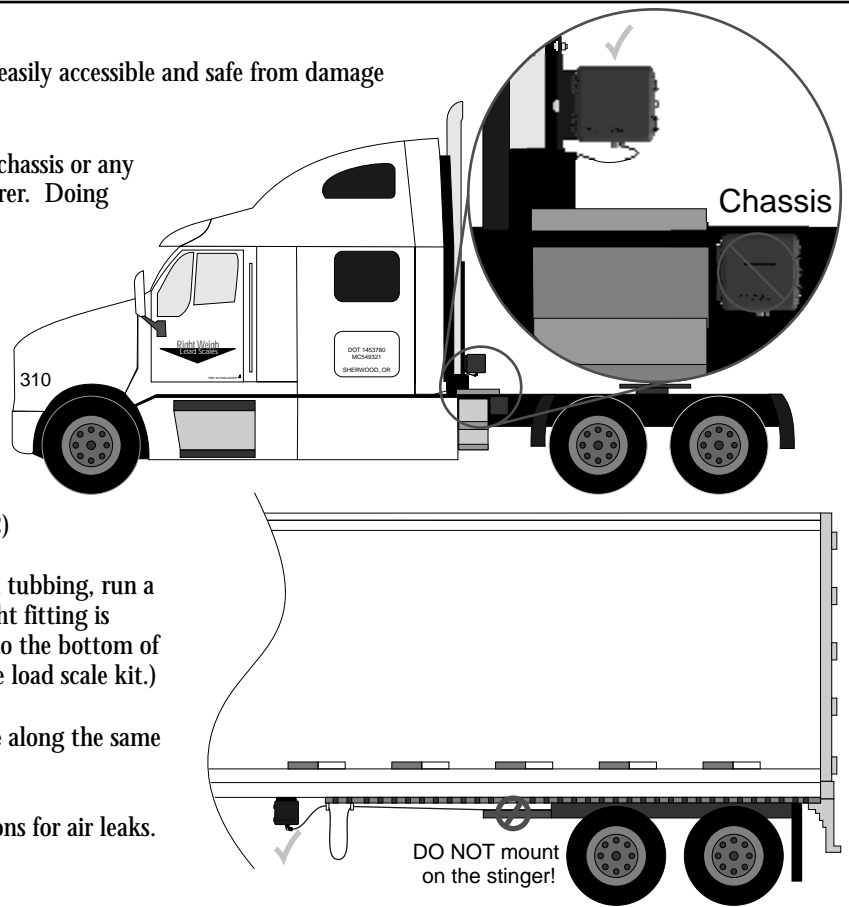

## Calibration Instructions:

Step 1: The vehicle must be loaded. For best results, calibrate with a loaded weight that is within 1,500 LBS (680 KG) of the legal limit for the axle group. (Do Not Calibrate Empty!)

Step 2: Using a certified in-ground scale, obtain a loaded weight for the axle group attached to the Right Weigh load scale.


Step 3: Park on a level surface. Shift the transmission to neutral and set the parking brakes.

Step 4: Chock the wheels to prevent unexpected vehicle movement.

Step 5: Release the parking and service brakes.

Step 6: Make sure the Height Control Valve (HCV) has fully inflated the air bags. If needed, briefly dump the air from the suspension and allow the HCV to refill the system. (This may take several minutes depending on the type of HCV.)

Step 7: Using a small flat head screwdriver, turn the calibration screw on the dial face until the gauge matches the certified scale weight. (Fig. 4)

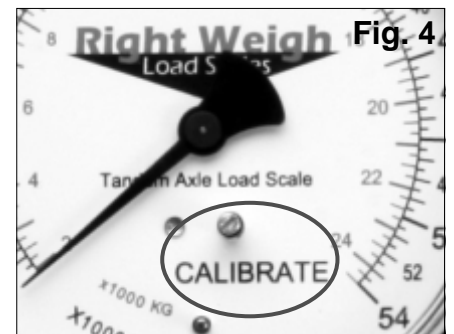

For additional installation support please call Right Weigh, Inc.

Toll free (888) 818-2058 or (503) 628-0838

©2006 Right Weigh, Inc. All rights reserved.